
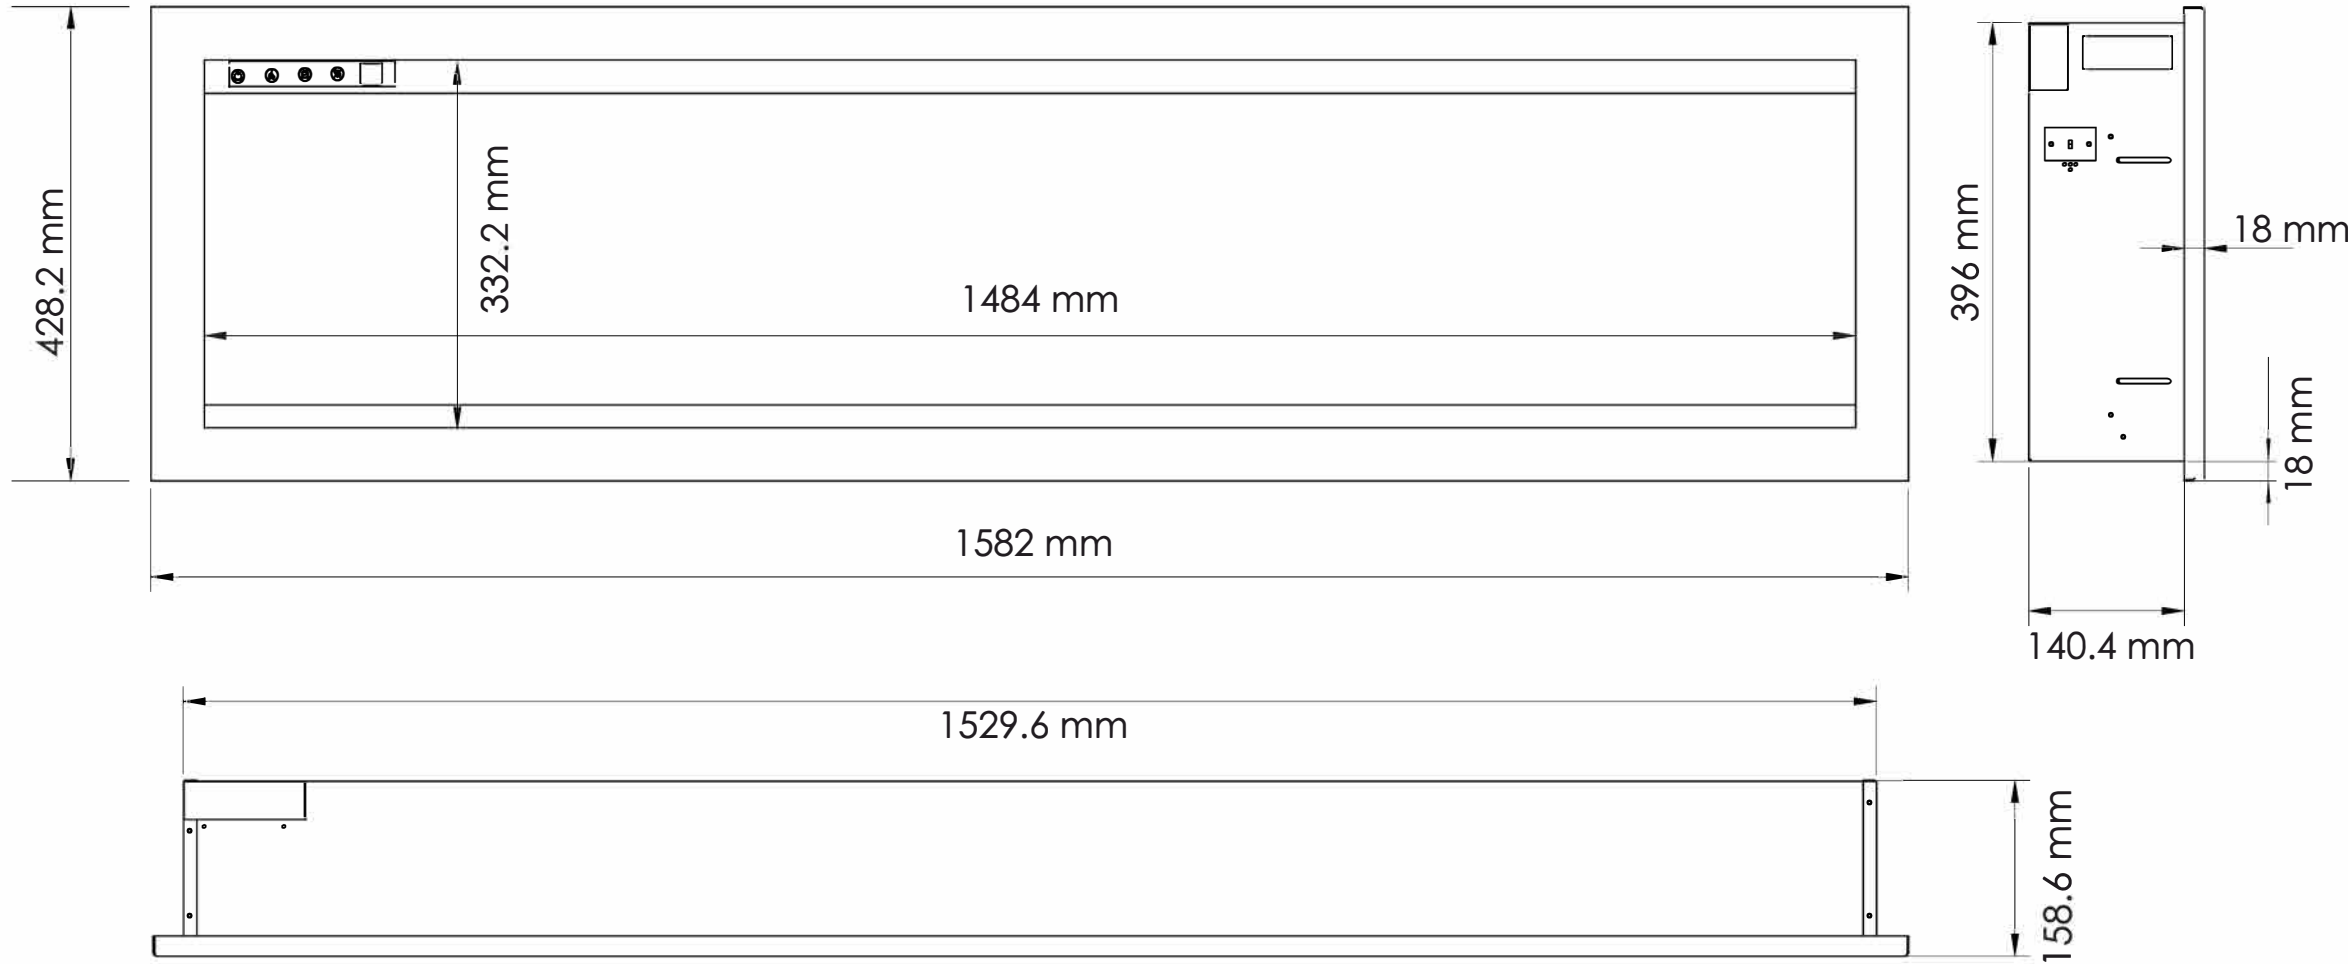


| TECHNICAL SPECIFICATIONS | | |
|--------------------------|-------------------------|------------|
| VOLTS | 120 | |
| AMPS | 12.5 | |
| WATTS | 1465 | |
| HEATER | HIGH | 1465 watts |
| | LOW | 600 watts |
| NO HEATER | 35watts max | |
| LAMPS | QUANTITY | LED |
| | WATTS | |
| | TOTAL WATTS | 22 watts |
| ROTOR MOTOR | 1 at 5 watts | |
| HEIGHT, WIDTH, DEPTH | 15 5/8 x 60 1/4 x 5 1/2 | |
| GLASS VIEWING OPENING | 13 1/8 x 58 3/8 | |
| SURROUND SIZE | 16 7/8 x 62 1/4 | |
| SHIPPING SIZE | 19 1/2 x 67 1/4 x 9 1/4 | |
| SHIPPING WEIGHT | | |
| | UNIT | |
| | STEEL FRONT | Included |
| PLUG LOCATION | Left Side | |
| CORD LENGTH | 70 7/8" | |
| APPROX. HEATING AREA | 400 sq ft | |




| | | | |
|------------------|------------------|---|-----|
| SERIES | MODEL |  | REV |
| WM-B | WM-60-B | | 1 |
| SCALE 1" = 1'-0" | DATE: 10/15/2018 | SHEET 1 OF 1 | |



| TECHNICAL SPECIFICATIONS | | |
|--------------------------|----------------------|------------|
| VOLTS | 120 | |
| AMPS | 12.5 | |
| WATTS | 1465 | |
| HEATER | HIGH | 1465 watts |
| | LOW | 600 watts |
| NO HEATER | 35watts max | |
| LAMPS | QUANTITY | LED |
| | WATTS | |
| | TOTAL WATTS | 22 watts |
| ROTOR MOTOR | 1 at 5 watts | |
| HEIGHT, WIDTH, DEPTH | 39.6 x 153 x 14 cm | |
| GLASS VIEWING OPENING | 33.2 x 148.4 cm | |
| SURROUND SIZE | 42.8 x 158.2 cm | |
| SHIPPING SIZE | 49.3 x 170.6 x 23 cm | |
| SHIPPING WEIGHT | | |
| | UNIT | |
| | GLASS FRONT | Included |
| PLUG LOCATION | Left Side | |
| CORD LENGTH | 180 cm | |
| APPROX. HEATING AREA | 37 sqm | |



| | | | |
|------------|------------------|---|-----|
| SERIES | MODEL |  | REV |
| WM-B | WM-60-B | | 1 |
| SCALE 1:12 | DATE: 10/15/2018 | SHEET 1 OF 1 | |